





WI-AP717MP

AC1200M Enterprise Mesh Access Point
Quick Install Guide


Package content

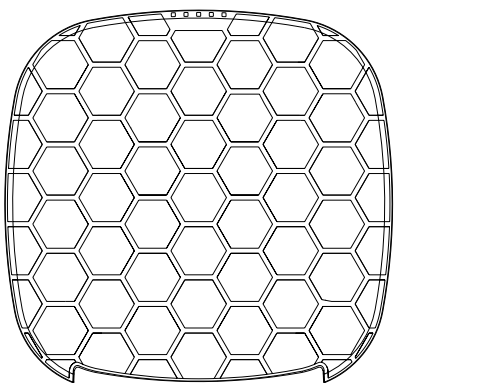

X1




X1




X1



X2



X2




X1




X1

Mounting


Wall

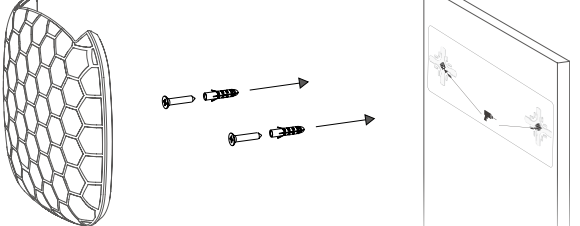


Pole

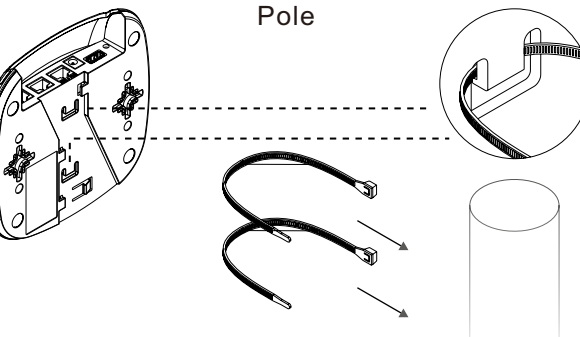


Ceiling

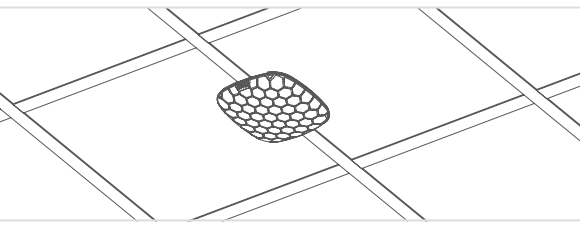

Mesh Wi-Fi Network Application

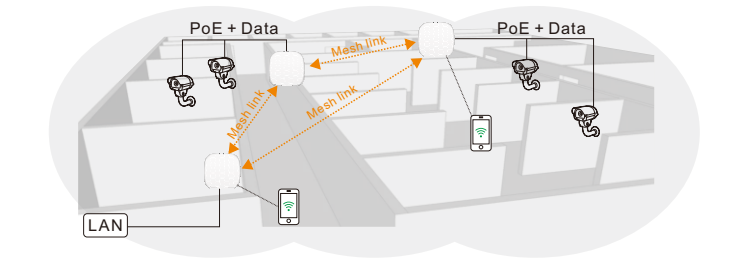



Three ports are available for bridging two of which offers PoE passthrough when the AP is powered by an 802.3af/at switch.

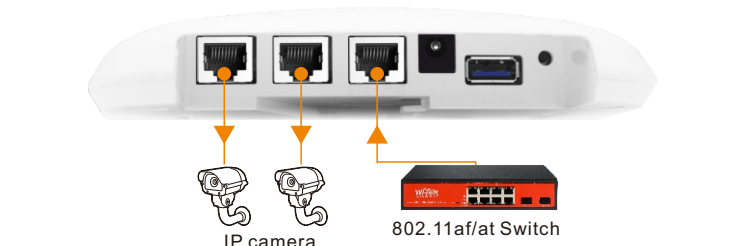

IP camera

802.11af/at Switch

Overview

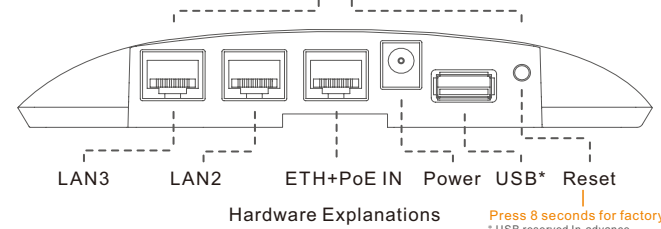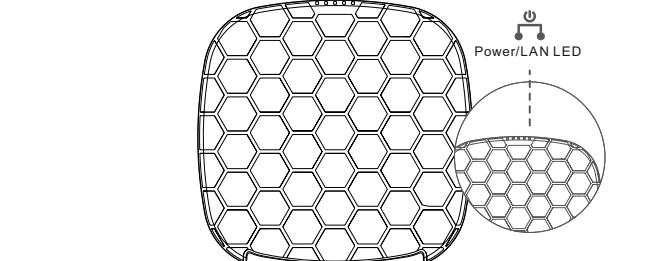

DC Power: 12V : LAN2-LAN3 port does not support PoE out. 48V : All ethernet port support PoE out.

Wi-Fi LED: Solid amber : 2.4G and 5G is enabled. Off : 2.4G and 5G is disable

Mesh LED: Solid amber : The Mesh system is working normally. Blinking amber : The Mesh link quality is very poor. Off : The Mesh system is not running.

Setup new Master AP




Please connect devices according to the above topology.

Follow the steps for quick Master AP configuration, using initial setup wizard:


Step 1 Connect your PC to device via Ethernet

Step 2 Launch your web browser then enter the device IP address in the address bar and specify the default login key: **admin**.


Note : In case the device is unable to obtain IP address from a DHCP server, it will fallback to the default static IP 192.168.1.88.

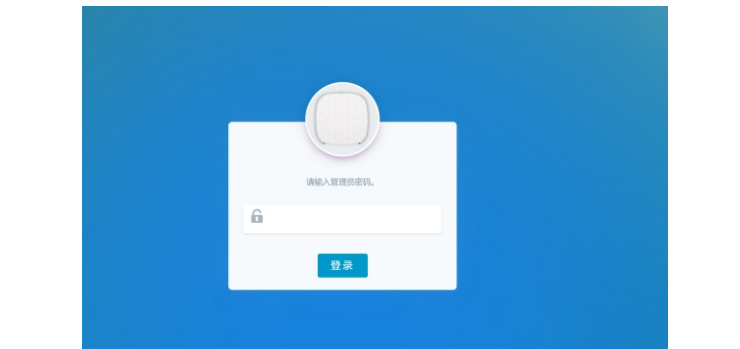


Step 3 Choose the device operating work mode AP and click NEXT button :

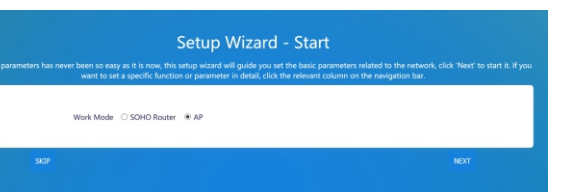


Step 4 Choose the device operating protocol DHCP Client and click NEXT button :

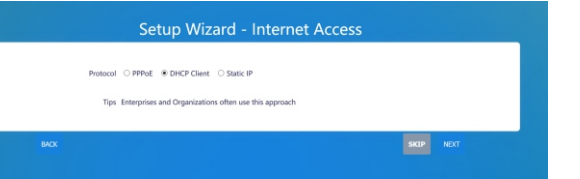


Step 5 Enter specify the SSID and Key of the wireless network and click NEXT button :

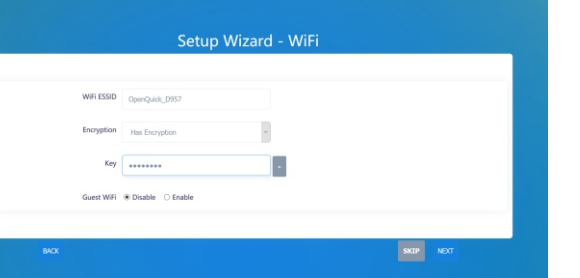


Step 6 Click COMPLETE button to end the quick setup:

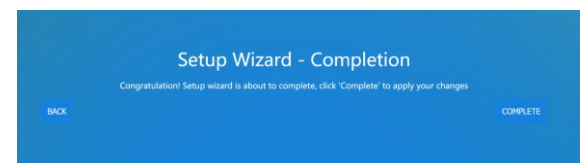


Adding a new Managed AP

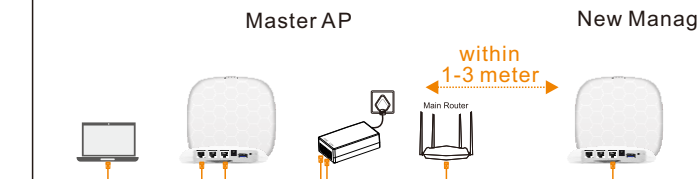


Step 1 Click Add Edge AP button to jump to the Mesh settings page

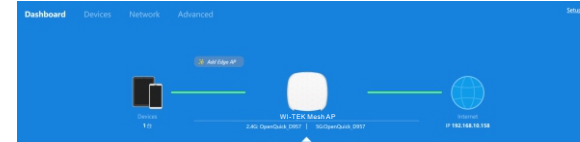

Step 2 Click Find new router button to Search for new AP

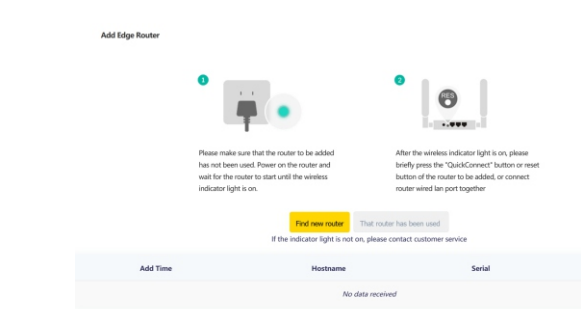

Step 3 Click Finish button to added managed AP

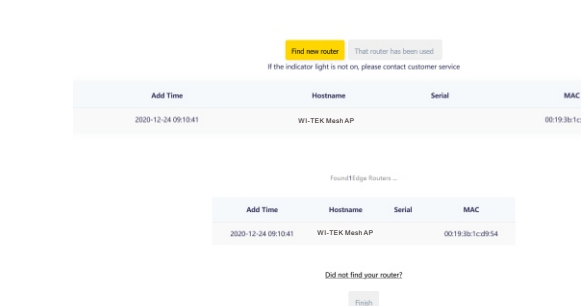

Warranty Card

| | |
|-------------------|--|
| Username | |
| Address | |
| Telephone No. | |
| Purchase Shop | |
| Purchase Address | |
| Product Model No. | |
| Purchase Time | |
| Serial No. | |
| Dealer Signature | |

- If the product defects within three months after purchase, we will provide you a new product of the same model.
- If the product defects within the three-year warranty period, we will provide the professional maintenance service.
- Proof of purchase and a complete product serial number are required to receive any services guaranteed as part of the limited warranty.
- Any other defects that are not caused by workmanship or product quality, such as natural disaster, water damage, extreme thermal or environmental conditions, sticker damaged, warranty card losing will disqualify the product from limited warranty.

